




外径 Outside dimension	7550×3550×3400mm(L×W×H)
内径 Inside dimension	6300×3450×2700mm(L×W×H)
静压室尺寸 Plenum Dimension	6300×3450×400mm(L×W×H)
地台 Basement	300 mm高镀锌板折弯地台, 全地格柵, 扁钢与扭纹钢焊接, 表面镀锌, 两只外置上车坡: 2000×520mm(L×W), 表面喷漆 300mm galvanized steel basement, full grilles made by flat bar and round steel then galvanized. 2 ramps, external setting, 2000×520mm(L×W), surface is painted.
房体 Room Body	后面配50mmEPS墙板, 其余为PVC软帘 Back side with 50mm EPS wall panels, the other 3 sides with PVC curtains;
照明 Lighting system	顶灯8组×4=32支36W灯管, 电子镇流器, 玻璃为5.0mm钢化玻璃 Ceiling lights 8units×4pcs=32pcs 36W, with electronic ballasts, 5.0mm clear tempered glass
机柜装置 Generator setting	后部排风, 镀锌板型材框架, 白色彩钢板蒙板 Exhaust air from rear side; galvanized steel molding frame, white coated steel cover.
送排风系统 Intake and Exhaust Air System	配一台双进风外转子离心风机, 风机型号: YDW-4.5S, 功率: 5.5KW, 风量: 15500m³/h; 电动排风风门 5.5KW double intake centrifugal fan, model YDW-4.5S, air capacity: 15500 m³/h, electric damper for exhaust air.
过滤系统 Filtering system	送风初效过滤、亚高效过滤, 排风玻璃纤维纤维过滤 Pre-filter, high efficiency filter, exhaust fiberglass filter
顶板 Roof Plates	镀锌板折弯 / Galvanized steel plates
电控系统 Control system	风机、照明开关, 急停开关 Fan operation switch, lighting switch, emergency stop;
安装方式 Setting Style	钢丝绳吊顶/立柱支撑 Suspending steel hook from roof of building or steel column supporting;



**YS-300-B**  
打磨房 PREP STATIONS

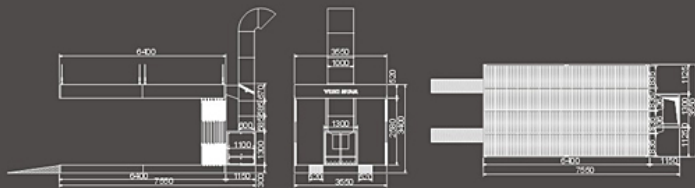

**YS-300-B 技术参数表**  
Technical Parameters for Prep Station YS-300-B

房体内径尺寸 / Inside Dimension: (mm)	6300×3450×2700 (L×W×H)
房体外径尺寸 / Outside Dimension: (mm)	7550×3550×3400 (L×W×H)
排风机风量 / Exhaust Air Fan Capacity: (m³/h)	15500
房内空载风速 / Free Air Speed: (m/s)	≥0.2
房内换气次数 / Frequency of Air Exchange: (time/h)	264
房内光照度 / Illumination: (Lux)	≥800
空气过滤效率 / Air Filter Efficiency: (%)	≥95%
噪音 / Noise: db(A)	< 80
总功率 / Total Power: (KW)	6.7